

OCS

Fiberstucco
Fibered One Coat Stucco

M Master Wall Inc.
Building a Culture of Excellence



M

MA



masterwall.com

Corporate Office P.O. Box 397 Fortson, GA 31808 800.755.0825




09 24 00 / 09 25 00

OCS *Fiberstucco*
Fibered One Coat Stucco

More Choices...More Warranties

Master Wall OCS Fiberstucco is an engineered, fiber-reinforced one coat stucco. It offers the durability of traditional stucco with easier application and a thinner cross section.

OCS Fiberstucco is available as a basic system (stucco & finish) or it can be upgraded with additives, rainscreens, leveling base coats and finishes.

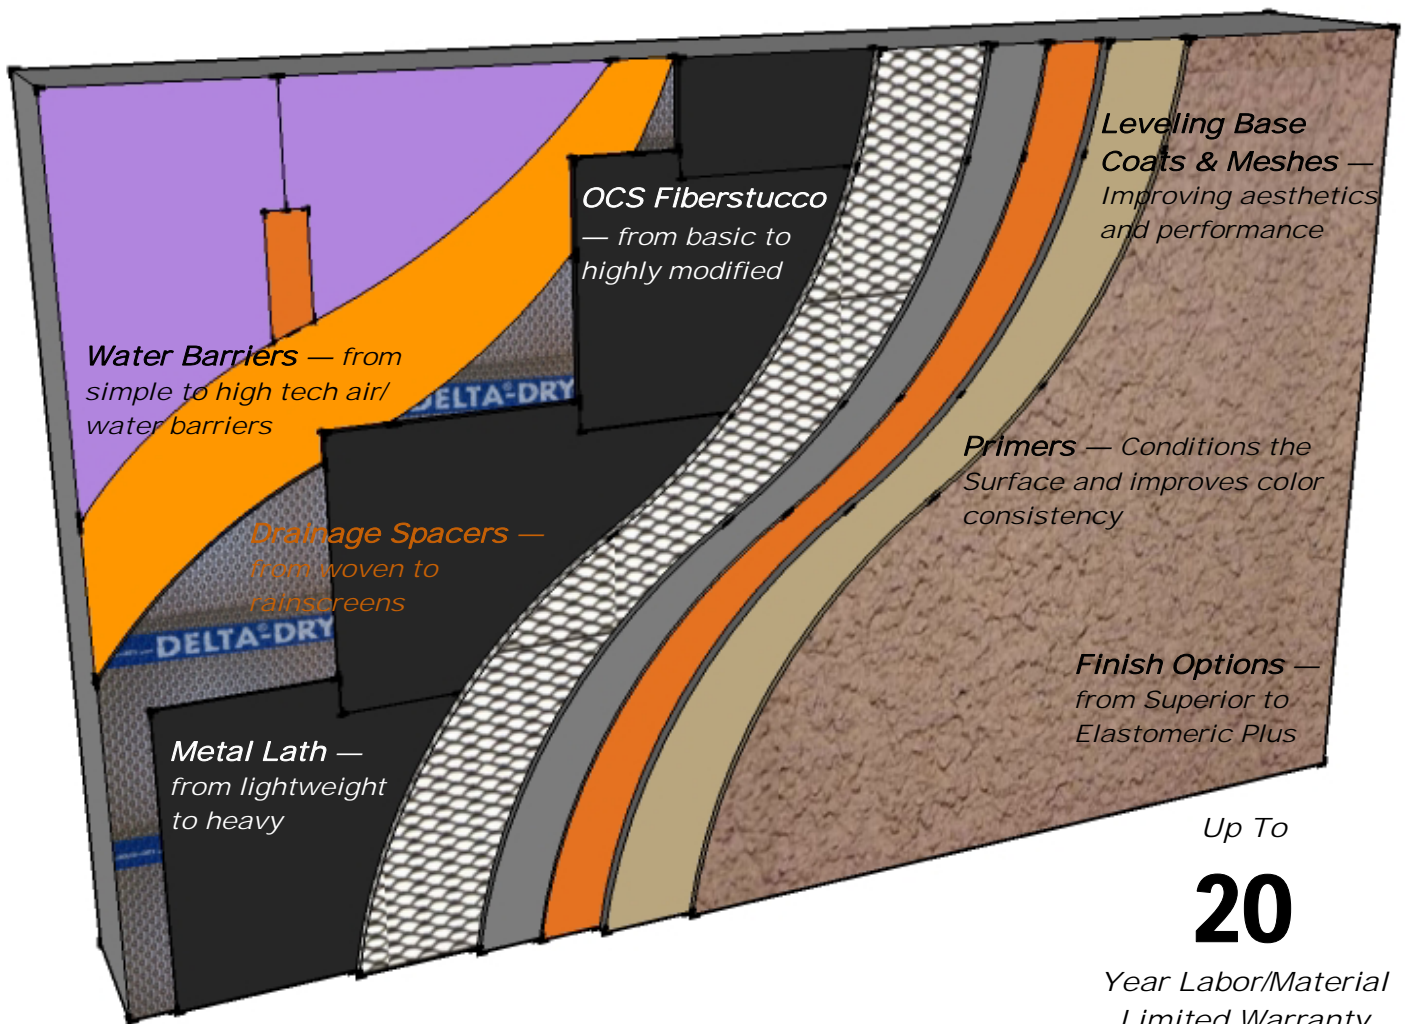

M **Master Wall Inc.**
Building a Culture of Excellence

©2011 Master Wall Inc.

P. O. Box 397
Fortson, GA 31808
800-755-0825
Technical 800-760-2861
www.masterwall.com


010111

Available Options

Weather Resistive Barriers (WRB)

WRB's provide secondary weather protection for the stucco application. A minimum of two layers is required over sheathing applications. For CMU and masonry, many architects are specifying secondary protection as well.

- 2-layers of ASTM D226 Asphalt Felt (over sheathing) – Minimum requirement
- 1-layer of Tyvek® StuccoWrap® with 1-layer of ASTM D226 Asphalt Felt – Improved weather protection with an easier installation.
- Master Wall Rollershield with 1-layer of ASTM D226 Asphalt Felt (over sheathing) – Fluid applied Rollershield offers 100% weather protection and doesn't rattle in the wind. It can be flashed into openings and has an extremely low air infiltration rate.
- Master Wall Rollershield over concrete or masonry – The same benefits of Rollershield over sheathing. No additional water barriers are required, lath must be used.

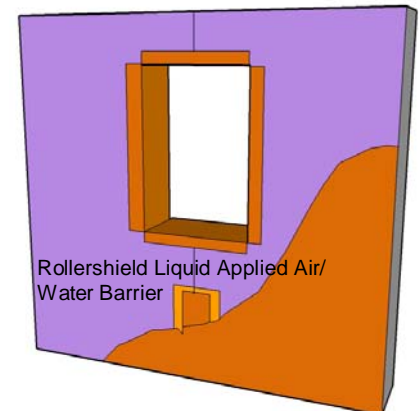

Drainage Mats or Spacers (DRS)

Providing even a small drainage space may be desired in certain climates to form a true capillary break in the wall system. Options range from simple drainage mats to true rainscreen protection.

- None – Follows traditional stucco application practices.
- Drainage Mat – Manufactured by Colbond, Keene or Benjamin Obdyke, these products use a randomly woven mat to provide a slight space for drainage. Place drainage mats between water barriers.
- Rainscreen: Cosella-Dörken Delta®-Dry offers a true ventilated rainscreen and pressure-equalized construction. Place Delta®-Dry between water barriers and provide ventilation at top and bottom.



Master Wall (OCS) Fiberstucco

Our OCS Fiberstucco has a decades-long track record of performance. It's manufactured with fibers and proprietary ingredients and independently tested to perform better than traditional stucco. Our OCS can be applied direct to concrete or masonry and offers a variety of applications with metal mesh or lath.

Stucco Additives (SA)

Master Wall Stucco Ad-Liquid improves the performance of the stucco. The 100% acrylic formulation is mixed into the OCS at different levels to improve durability and crack resistance. Our BA57 bonding agent can be specified as the bonding agent when applying OCS over porous concrete or masonry.

Leveling Base Coats (LBC)

Master Wall base coats mix smooth and creamy. When applied over OCS they can fine-tune the surface, making the finish application look better. Embedding Master Wall Standard Mesh into the base coat improves the crack resistance of the OCS as well as helping level the surface.

Finishing Options and Finish Additives (PRIME, FA & FIN)

Priming the wall with Master Wall Primecoat or Sanded Primecoat conditions the surface and extends finish coverage. Silicone Coat adds silicone to the finishes for better water resistance and Excel Protection boosts the finishes resistance to mold and mildew growth.

Master Wall Superior Finishes are manufactured with 100% pure acrylic polymers and feature Dirt Pickup Resistance (DPR). Our flexible Superior Elastomeric Plus finishes help bridge minor hairline cracks in stucco.



Warranty Extension Options

Corporate: 800-755-0825

Technical: 800-760-2861

Item	Description	Term*	✓
Weather Resistive Barriers (WRB) and Drainage Spacers (DRS)			
WRB01	2- ASTM D226 Asphalt Felt (minimum over sheathing)	0	<input type="checkbox"/>
WRB02	Tyvek® StuccoWrap® or similar with 1-layer of ASTM D226 Asphalt Felt (over sheathing)	0	<input type="checkbox"/>
WRB03	Master Wall Rollershield with 1-layer of ASTM D226 Asphalt Felt (over sheathing)	5	<input type="checkbox"/>
WRB04	Master Wall Rollershield (over concrete or masonry, lath required)	5	<input type="checkbox"/>
DRS00	No Spacer	0	<input type="checkbox"/>
DRS01	Drainage Mat: Colbond, Keene, Benjamin Obdyke	0	<input type="checkbox"/>
DRS02	Rainscreen: Cosella-Dörken Products, Inc. Delta® -Dry, Delta® -Dry Plus	1	<input type="checkbox"/>
OCS Fiberstucco (OCS)			
OCS01	Master Wall OCS Fiberstucco with 17 ga. woven wire fabric reinforcement, 3/8" thick	2	<input type="checkbox"/>
OCS02	Master Wall OCS Fiberstucco direct to Masonry/Concrete (no Rollershield), 3/8"-1/2" thick	3	<input type="checkbox"/>
OCS03	Master Wall OCS Fiberstucco with 2.5#/sy self-furring reinforcement, 1/2" thick	3	<input type="checkbox"/>
OCS04	Master Wall OCS Fiberstucco with 3.4#/sy self-furring reinforcement, 3/4" thick	4	<input type="checkbox"/>
Stucco Additives (SA)			
SA00	None	0	<input type="checkbox"/>
SA01	Master Wall Stucco Ad Liquid, 3 qt per mix of OCS Concentrate, 1 qt per bag of Ready OCS	1	<input type="checkbox"/>
SA02	Master Wall Stucco Ad Liquid, 2 gal per mix of OCS Concentrate, 3 quarts per bag of Ready OCS	2	<input type="checkbox"/>
SA03	Master Wall Stucco Ad Liquid, 5 gal per mix of OCS Concentrate, 1-1/2 gal per bag of Ready OCS	3	<input type="checkbox"/>
Leveling Base Coats (LBC)			
LBC00	None	0	<input type="checkbox"/>
LBC01	F&M, F&M Plus, MBB or Guardian Skim Coat	1	<input type="checkbox"/>
LBC02	F&M, F&M Plus, MBB or Guardian Skim Coat with Master Wall Standard Reinforcing Mesh	2	<input type="checkbox"/>
Primers (PRIME), Finish Additives (FA), Finish Options (FIN)			
PRIME00	No Primer	0	<input type="checkbox"/>
PRIME01	Primecoat or Sanded Primecoat tinted primer	1	<input type="checkbox"/>
FIN01	Superior Finish	1	<input type="checkbox"/>
FA01	Excel Additive (to any finish)	0.5	<input type="checkbox"/>
FA02	Silicone Coat (to any finish)	0.5	<input type="checkbox"/>
FIN02	Superior Elastomeric Plus Finish	3	<input type="checkbox"/>

Example of basic system: WRB01 (0) + OCS03 (3) with PRIME01 (1) and FIN01 (1) = 5 year warranty

*minimum requirement for warranty: OCS and finish

Total Warranty Years

With Master Wall, your options add up!



masterwall.com